



WH BK SV

In-tech square

- Aluminum die casting with powder coating.
- 99.8% pure aluminum reflector.
- Optional accessories available.
- Various light sources in LED module and Gx5.3 MR16.




18°




28°

DALI TRIAC LED IP20 0-10V RA>80 RA>90




CODE	Watts	CCT	Beam	Lumen
2179T-072S	7W	WL 2700K	18°	587 lm
2179T-072M	7W	WL 2700K	28°	538 lm
2179T-073S	7W	WL 3000K	18°	605 lm
2179T-073M	7W	WL 3000K	28°	554 lm
2179T-074S	7W	NL 4000K	18°	665 lm
2179T-074M	7W	NL 4000K	28°	610 lm
2179T-092S	9W	WL 2700K	18°	703 lm
2179T-092M	9W	WL 2700K	28°	640 lm
2179T-093S	9W	WL 3000K	18°	725 lm
2179T-093M	9W	WL 3000K	28°	660 lm
2179T-094S	9W	NL 4000K	18°	798 lm
2179T-094M	9W	NL 4000K	28°	726 lm
2179T-132S	13W	WL 2700K	18°	883 lm
2179T-132M	13W	WL 2700K	28°	700 lm
2179T-133S	13W	WL 3000K	18°	910 lm
2179T-133M	13W	WL 3000K	28°	721 lm
2179T-134S	13W	NL 4000K	18°	1000 lm
2179T-134M	13W	NL 4000K	28°	793 lm

TRIAC Gx5.3 IP20



CODE	Watts
2179TM	50W max

TRIAC GU10 IP20




CODE

Watts

2179TG

50W max

DALI TRIAC LED IP20 0-10V RA>80 RA>90

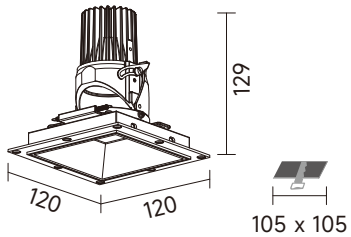

CODE

Watts

CCT

Beam

Lumen

2179S-072S	7W	WL 2700K	18°	587 lm
2179S-072M	7W	WL 2700K	28°	538 lm
2179S-073S	7W	WL 3000K	18°	605 lm
2179S-073M	7W	WL 3000K	28°	554 lm
2179S-074S	7W	NL 4000K	18°	665 lm
2179S-074M	7W	NL 4000K	28°	610 lm
2179S-092S	9W	WL 2700K	18°	703 lm
2179S-092M	9W	WL 2700K	28°	640 lm
2179S-093S	9W	WL 3000K	18°	725 lm
2179S-093M	9W	WL 3000K	28°	660 lm
2179S-094S	9W	NL 4000K	18°	798 lm
2179S-094M	9W	NL 4000K	28°	726 lm
2179S-132S	13W	WL 2700K	18°	883 lm
2179S-132M	13W	WL 2700K	28°	700 lm
2179S-133S	13W	WL 3000K	18°	910 lm
2179S-133M	13W	WL 3000K	28°	721 lm
2179S-134S	13W	NL 4000K	18°	1000 lm
2179S-134M	13W	NL 4000K	28°	793 lm

TRIAC Gx5.3 IP20




CODE

Watts

2179SM

50W max



TRIAC GU10 IP20



CODE

Watts

2179SG

50W max

