

WH BK

Inn largo

- Single and twin designed for architectural lighting, 20W LED with high efficiency reflector, medium beam and flood beam in option.
- Ar111 bulb either for LED AR111 with G53 lamp holder or special AR111 light source ,provided by BUCKINGHAM as code number jl-ar111-a or jl-ar111, Medium and flood beam is optional in special AR111 light source , also CDM is in option.
- Free in all direction with 30 degree tilt, good choice for shop and retail business.




20



40°

DALI TRIAC LED IP20 0-10V RA>80 RA>90

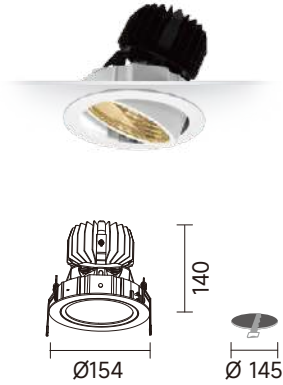

CODE	Watts	CCT	Beam	Lumen
85216-202S	20W	WL 2700K	20°	1861 lm
85216-202L	20W	WL 2700K	40°	1800 lm
85216-203S	20W	WL 3000K	20°	1919 lm
85216-203L	20W	WL 3000K	40°	1856 lm
85216-204S	20W	NL 4000K	20°	2110 lm
85216-204L	20W	NL 4000K	40°	2041 lm

DALI TRIAC LED IP20 0-10V RA>80 RA>90



CODE	Watts	CCT	Beam	Lumen
85226-402S	20W * 2	WL 2700K	20°	3555 lm
85226-402L	20W * 2	WL 2700K	40°	3509 lm
85226-403S	20W * 2	WL 3000K	20°	3665 lm
85226-403L	20W * 2	WL 3000K	40°	3618 lm
85226-404S	20W * 2	NL 4000K	20°	4031 lm
85226-404L	20W * 2	NL 4000K	40°	3979 lm

TRIAC G53 IP20




CODE

Watts

82211

100W



TRIAC G53 IP20



CODE

Watts

82221

100W * 2

