



WH BK

Inn mini

- Single and Twin designed for architectural lighting, 10W LED with high efficiency reflector, Medium beam and flood Beam in option.
- Designed for LED MR16 bulb with Gx5.3 lamp holder, or LED GU10 with GU10 lamp holder.
- Free in all direction with 20 degree tilt, good choice for shop and retail business.




24°



38°

DALI TRIAC LED IP20 0-10V RA>80 RA>90

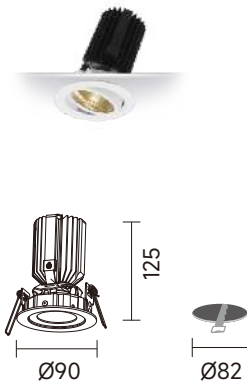

CODE	Watts	CCT	Beam	Lumen
85116-102M	10W	WL 2700K	24°	1017 lm
85116-102L	10W	WL 2700K	38°	905 lm
85116-103M	10W	WL 3000K	24°	1049 lm
85116-103L	10W	WL 3000K	38°	933 lm
85116-104M	10W	NL 4000K	24°	1154 lm
85116-104L	10W	NL 4000K	38°	1026 lm

DALI TRIAC LED IP20 0-10V RA>80 RA>90



CODE	Watts	CCT	Beam	Lumen
85126-202M	10W * 2	WL 2700K	24°	1988 lm
85126-202L	10W * 2	WL 2700K	38°	2025 lm
85126-203M	10W * 2	WL 3000K	24°	2050 lm
85126-203L	10W * 2	WL 3000K	38°	2088 lm
85126-204M	10W * 2	NL 4000K	24°	2255 lm
85126-204L	10W * 2	NL 4000K	38°	2297 lm

TRIAC

Gx5.3

GU10

IP20



CODE


Watts

82111

50W max

82141

50W max

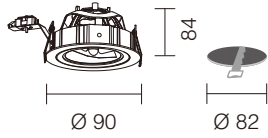

TRIAC

Gx5.3

GU10

IP20



CODE

Watts

82121

50W max

82142

50W max

