



WH BK

Pro largo

- Multiple combo design in trim with frame and trimless with no frame.
- Design in 20W and 10W in option, medium beam and flood beam in option.
- Free in all direction with 30 degree tilt, open air ventilation design reduce the operation temperature.
- Good choice for shop and retail business.




20°




40°

DALI TRIAC LED IP20 0-10V RA>80 RA>90

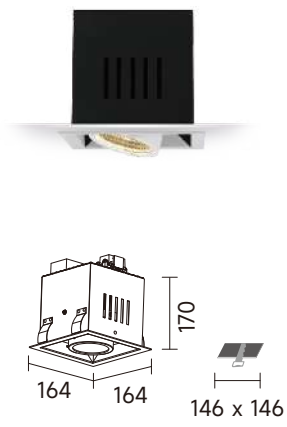


CODE	Watts	CCT	Beam	Lumen
85416-202S	20W	WL 2700K	20°	1861 lm
85416-202L	20W	WL 2700K	40°	1800 lm
85416-203S	20W	WL 3000K	20°	1919 lm
85416-203L	20W	WL 3000K	40°	1856 lm
85416-204S	20W	NL 4000K	20°	2110 lm
85416-204L	20W	NL 4000K	40°	2041 lm

DALI TRIAC LED IP20 0-10V RA>80 RA>90

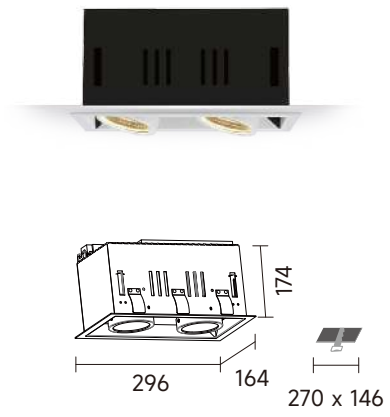

CODE	Watts	CCT	Beam	Lumen
85426-402S	20W * 2	WL 2700K	20°	3555 lm
85426-402L	20W * 2	WL 2700K	40°	3509 lm
85426-403S	20W * 2	WL 3000K	20°	3665 lm
85426-403L	20W * 2	WL 3000K	40°	3618 lm
85426-404S	20W * 2	NL 4000K	20°	4031 lm
85426-404L	20W * 2	NL 4000K	40°	3979 lm

DALI TRIAC LED IP20 0-10V RA>80 RA>90

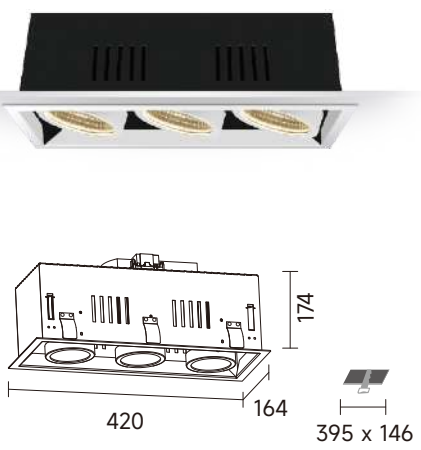

CODE	Watts	CCT	Beam	Lumen
85436-602S	20W * 3	WL 2700K	20°	5262 lm
85436-602L	20W * 3	WL 2700K	40°	5205 lm
85436-603S	20W * 3	WL 3000K	20°	5425 lm
85436-603L	20W * 3	WL 3000K	40°	5366 lm
85436-604S	20W * 3	NL 4000K	20°	5967 lm
85436-604L	20W * 3	NL 4000K	40°	5902 lm

TRIAC G53 IP20




CODE

Watts

82411

100W



TRIAC G53 IP20




CODE

Watts

82421

100W



TRIAC G53 IP20



CODE

Watts

82431

100W

